

# SOLIS

— THE TOUGHEST —  
**PERFORMER**  
« FOR YOUR FIELD »

**75**



4 CYLINDER TURBO  
CHARGED ENGINE

12F+12R SYNCHROMESH  
SHUTTLE TRANSMISSION

HEAVY LIFT  
CAPACITY

TWIN PROJECTOR  
HEADLAMPS

INTEGRATED SAFETY  
HVAC CABIN (OPTIONAL)



**COST  
EFFICIENT**  
MECHANICAL TRACTORS

MADE OF  
**REAL  
STEEL**

STRATEGIC  
COLLABORATION  
WITH  
**YANMAR**

THE TOUGHEST  
PERFORMER  
« FOR YOUR FIELD »

75


Solis



FEATURES	75
<b>ENGINE</b>	
Engine Type	4 Cylinder Turbocharged
Emission	Stage 2 / Stage 3
HP Category	75
No. of Cylinders	4
Aspiration	Turbocharged
Cubic Capacity (cc)	3707
Rated RPM	2200/2000
Air Cleaner	Dry Air Cleaner
Cold Start	Standard
Max Torque (Nm)	278 Nm @1200   289 Nm @1300
Exhaust	Updraft/ Downdraft (Optional)
Muffler	Under-hood
<b>TRANSMISSION</b>	
Drive	4WD
Clutch	Double
Gearbox	12F+12R
Front Axle	4WD
Transmission	Synchromesh Shuttle Transmission
<b>SPEED (FORWARD)</b>	
Maximum Speed (Km/Hr)	33.73 @ 2200 erpm
Minimum Speed (Km/Hr)	1.69 @ 2200 erpm
<b>BRAKES</b>	
Brakes	Oil Immersed Brake
Type of Actuation	Mechanical
Parking Brake	Mechanical, Hand Operated
<b>DIFFERENTIAL LOCK</b>	
Differential Lock	Mechanical, Foot Operated
<b>PTO</b>	
PTO (RPM)	540/540E & 540/1000 (Optional)
PTO (Actuation)	Independent (Mechanical)
<b>STEERING</b>	
Steering	Power
<b>ELECTRICAL</b>	
Battery	12V, 110Ah
Alternator	12V , 36 AMP (90 Amp)
Seven Pin Trailer Socket	Output 12V
<b>HYDRAULICS</b>	
3 Point Linkage	CAT-II
Stay Bars	Adjustable
Hydraulic Lifting Capacity (Kg)	2500/3000 (Optional)
Auxiliary Hydraulic Circuit	2SA/2DA

FEATURES	75
<b>SAFETY SWITCH</b>	
PTO Safety Switch	Standard
Neutral Safety Switch	Standard
<b>TURNING RADIUS</b>	
Without Brakes (m)	4.76
<b>TYRE</b>	
Front	11.2 - 24
Rear	16.9 - 30
<b>DIMENSION &amp; WEIGHT (+/-5%)</b>	
Weight (Kg)	3280
Wheel Base (mm)	2340
Total Length (mm)	4280
Total Width (mm)	2060-2350
Height (mm) Up to ROPS	2700
Min. Ground Clearance (mm)	385
Front Track (mm)	1470-1910
Rear Track (mm)	1390-1910
<b>OTHERS</b>	
Fuel Indicator Gauge	Standard
Front Tow Hook	Standard, Inbuilt in Front Weights
Front Weights with Std. Ballast	Front - 30*2+25*4 Rear - 34*1
Trailer Hitch	Swinging Draw Bar with Rotating Tow Hook
Roll Over Protection	Standard
<b>OPTIONAL FEATURES</b>	
Cabin	HVAC/Heater (Optional)
Front Mudguard	Optional
Platform	ITAT Plus (Flat Floor)
Optional Tyre Size	1) Front Tyre: 12.4x24   Rear Tyre: 18.4x30 (R-2) 2) Front Tyre: 12.4x24   Rear Tyre: 18.4x30 3) Front Tyre: 280/85R24   Rear Tyre: 420/85R30 4) Front Tyre: 12.4x24   Rear Tyre: 13.6x38 5) Front Tyre: 12.4x24   Rear Tyre: 340/85R38 6) Front Tyre: 7.5x16   Rear Tyre: 420/85R30 7) Front Tyre: 7.5x16   Rear Tyre: 16.9x30 8) Front Tyre: 7.5x16   Rear Tyre: 13.6x38 9) Front Tyre: 320/85R24   Rear Tyre: 460/85R30
Front and Rear Weights	Front 25x2 Kg   Rear: 2x34 Kg on Each Wheel
Carraro Transmission	Creeper speeds (Carraro Transmission)

\*Data and specifications are subject to change without any advance notice due to continuous product improvement and development. All Dimensions are with standard tyres.

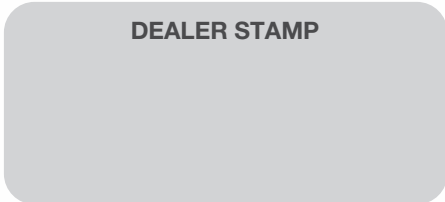

## INTERNATIONAL TRACTORS LIMITED

International Business Office: Teri School of Advanced Studies, Plot No.10, Institutional Area, Vasant Kunj, New Delhi-110070 (India)

Phone: +91 11 66 45 5200 | Work: Jalandhar Road, Hoshiarpur - 146022, Punjab (India) | Phone: +91-01882-522220/ 522221

Fax:+91- 01882-522222 | Email: info@solisworld.com | URL: www.solistractors.com